




# NTN-BOWER LTD.

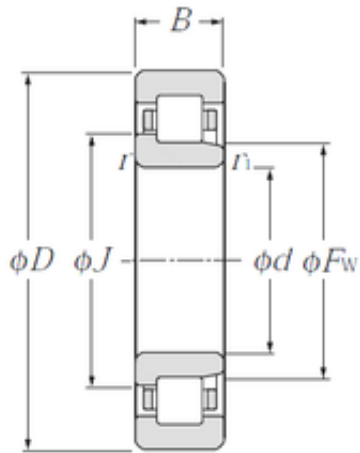

50 mm x 90 mm x 23 mm NTN NJ2210 JAPAN  
Bearing 130\*230\*64

Bearing No. NJ2210

NJ2210 Bearing 2D drawings and 3D CAD models

Size	50x90x23 mm
Bore Diameter	50 mm
Outer Diameter	90 mm
Width	23 mm
d	50 mm
Fw	60,4 mm
D	90 mm
B	23 mm
C	23 mm
r min.	1,1 mm
r1 min.	1,1 mm
J	64,6 mm
Weight	0,571 Kg
Basic dynamic load rating (C)	64 kN
Basic static load rating (C0)	73,5 kN
(Grease) Lubrication Speed	6 900 r/min
E	80.4 mm
F	60.4 mm
d1	64.6 mm
rs min	1.1 mm
r1s min	1.1 mm
Radial clearance class	CN
Mass (without HJ ring)	0.6 kg
Dynamic load, C	64 kN
Static load, C0	73.5 kN



## NTN-BOWER LTD.

Fatigue limit load, Cu	9 kN
Nlim (oil)	8,100 rpm
Nlim (grease)	6,900 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.9 Hz
Characteristic outer ring frequency, BPF0	6.44 Hz
Characteristic inner ring frequency, BRFI	8.56 Hz
da min	56.5 mm
da max	58 mm
dc min	67 mm
Da max	83.5 mm
ra max	1 mm
Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.59
Product Group	B04144
Bore Profile	Straight
Cage Material	Steel
Precision Class	RBEC 1   ISO P0
Number of Rows of Rollers	Single Row
Separable	Inner Ring - One Side
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring



## NTN-BOWER LTD.

Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	1 Rib Inner Ring   2 Rib Outer Ring   Cage On Outer Ring ID
Long Description	50MM Bore; Straight Bore Profile; 90MM Outside Diameter; 23MM Width; Steel Cage Material; RBEC 1   ISO P0; Single Row; Inner Ring - One Side Separable; No Snap Ring; Relubricatable; C0-Medium Intern
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	NJ2210
Weight / LBS	1.291
Outside Diameter	3.543 Inch   90 Millimeter
Width	0.906 Inch   23 Millimeter
Bore	1.969 Inch   50 Millimeter
bore diameter:	50 mm
static load capacity:	73500 N
outside diameter:	90 mm
precision rating:	ISO Class 0
overall width:	23 mm
maximum rpm:	8100 rpm
flanges:	(2) Outer Ring, (1) Inner Ring



## NTN-BOWER LTD.

bearing material:	Hardened Alloy Steel
bore type:	Straight
cage material:	Pressed Steel
number of rows:	1
finish/coating:	Uncoated
internal clearance:	CN
closure type:	Open
operating temperature range:	-40 to 120 ° C
fillet radius:	1 mm
dynamic load capacity:	64000 N
manufacturer product page:	<a href="#">Click here</a>